

1:18-SCALE 4WD MONSTER TRUCK

ECX01000|ECX01000EU|ECX01000UK

INSTRUCTION MANUAL BEDIENUNGSANLEITUNG MANUEL D'UTILISATION MANUALE Congratulations on your purchase of the ECX® Ruckus® 4WD Monster Truck. This 1:18-scale model introduces you to the sport of RC driving.

Herzlichen Glückwunsch zum Kauf des ECX Ruckus 4WD Monster Truck. Dieses 1:18 Scale Model öffnet Ihnen die Welt des RC Car Sports.

Nous vous félicitons pour l'achat du ECX Ruckus 4WD Monster Truck. Ce modèle 1:18 vous introduit au sport de la conduite RC.

Congratulazioni per l'acquisto di questo Ruckus ECX 4WD Monster Truck. Questa vettura in scala 1:18 vi introdurrà nel mondo dei modelli RC.

NOTICE

All instructions, warranties and other collateral documents are subject to change at the sole discretion of Horizon Hobby, Inc. For up-to-date product literature, visit http://www.horizonhobby.com and click on the support tab for this product.

Meaning of Special Language:

The following terms are used throughout the product literature to indicate various levels of potential harm when operating this product: **NOTICE:** Procedures, which if not properly followed, create a possibility of physical property damage AND little or no possibility of injury. **CAUTION:** Procedures, which if not properly followed, create the probability of physical property damage AND a possibility of serious injury.

WARNING: Procedures, which if not properly followed, create the probability of property damage, collateral damage, and serious injury OR create a high probability of superficial injury.

WARNING: Read the ENTIRE instruction manual to become familiar with the features of the product before operating. Failure to operate the product correctly can result in damage to the product, personal property and cause serious injury.

This is a sophisticated hobby product and NOT a toy. It must be operated with caution and common sense and requires some basic mechanical ability. Failure to operate this Product in a safe and responsible manner could result in injury or damage to the product or other property. This product is not intended for use by children without direct adult supervision. Do not use with incompatible components or alter this product in any way outside of the instructions provided by Horizon Hobby, Inc. This manual contains instructions for safety, operation and maintenance. It is essential to read and follow all the instructions and warnings in the manual, prior to assembly, setup or use, in order to operate correctly and avoid damage or serious injury.

Age Recommendation: Not for children under 14 years. This is not a toy.

Safety Precautions and Warnings

As the user of this product, you are solely responsible for operating in a manner that does not endanger yourself and others or result in damage to the product or property of others.

This model is controlled by a radio signal subject to interference from many sources outside your control. This interference can cause momentary loss of control, so it is advisable to always keep a safe distance in all directions around your model as this margin will help avoid collisions or injury.

- Never operate your model with low transmitter batteries.
- Always operate your model in open spaces away from full-size vehicles, traffic and people.
- Never operate the model in the street or in populated areas for any reason.
- Carefully follow the directions and warnings for this and any optional support equipment (chargers, rechargeable battery packs, etc.) you use.
- Keep all chemicals, small parts and anything electrical out of the reach of children.

- Never lick or place any portion of the model in your mouth as it could cause serious injury or even death.
- Exercise caution when using tools and sharp instruments.
- Take care during maintenance as some parts may have sharp edges.
- Immediately after using your model, do NOT touch equipment such as the motor, electronic speed control and battery, because they generate high temperatures. You may burn yourself seriously touching them.
- Do not put fingers or any objects inside rotating and moving parts, as this may cause damage or serious injury.
- Always turn on your transmitter before you turn on the receiver in the car. Always turn off the receiver before turning your transmitter off.
- Keep the wheels of the model off the ground when checking the operation of the radio equipment.

TABLE OF CONTENTS

| Specifications | When You Are Finished |
|----------------------------------|--|
| Components | Setting the Gear Mesh9 |
| Charging Warnings | Initial Setup9 |
| | Binding |
| Removing the Vehicle Body | Maintenance |
| Installing Transmitter Batteries | Troubleshooting Guide10 |
| Transmitter Controls | Limited Warranty 11 |
| Installing the Vehicle Battery6 | Warranty and Service Contact Information |
| Getting Štarted7 | |
| Installing the Vehicle Body7 | Parts Diagram |
| Operation | Parts List |

WATER-RESISTANT VEHICLE WITH WATERPROOF ELECTRONICS

Your new Horizon Hobby vehicle has been designed and built with a combination of waterproof and water-resistant components to allow you to operate the product in many "wet conditions", including puddles, creeks, wet grass, snow and even rain.

While the entire vehicle is highly water-resistant, it is not completely waterproof and your vehicle should NOT be treated like a submarine. The various electronic components used in the vehicle, such as the Electronic Speed Control (ESC), servo(s) and receiver are waterproof, however, most of the mechanical components are water-resistant and should not be submerged.

Metal parts, including the bearings, hinge pins, screws and nuts, as well as the contacts in the electrical cables, will be susceptible to corrosion if additional maintenance is not performed after running in wet conditions. To maximize the long-term performance of your vehicle and to keep the warranty intact, the procedures described in the "Wet Conditions Maintenance" section below must be performed regularly if you choose to run in wet conditions. If you are not willing to perform the additional care and maintenance required, then you should not operate the vehicle in those conditions.

CAUTION: Failure to exercise caution while using this product and complying with the following precautions could result in product malfunction and/or void the warranty.

General Precautions

- Read through the wet conditions maintenance procedures and make sure that you have all the tools you will need to properly maintain your vehicle.
- Not all batteries can be used in wet conditions. Consult the battery manufacturer before use. Caution should be taken when using Li-Po batteries in wet conditions.
- Most transmitters are not water-resistant. Consult your transmitter's manual or the manufacturer before operation.
- Never operate your transmitter or vehicle where lightning may be present.
- Do not operate your vehicle where it could come in contact with salt water (ocean water or water on salt-covered roads), contaminated or polluted water. Salt water is very conductive and highly corrosive, so use caution.
- Even minimal water contact can reduce the life of your motor if it has not been certified as water-resistant or waterproof. If the motor becomes excessively wet, apply very light throttle until the water is mostly removed from the motor. Running a wet motor at high speeds may rapidly damage the motor.

 Driving in wet conditions can reduce the life of the motor. The additional resistance of operating in water causes excess strain. Alter the gear ratio by using a smaller pinion or larger spur gear. This will increase torque (and motor life) when running in mud, deeper puddles, or any wet conditions that will increase the load on the motor for an extended period of time.

Wet Conditions Maintenance

 Drain any water that has collected in the tires by spinning them at high speed. With the body removed, place the vehicle upside down and pull full throttle for a few short bursts until the water has been removed.

CAUTION: Always keep hands, fingers, tools and any loose or hanging objects away from rotating parts when performing the above drying technique.

- Remove the battery pack(s) and dry the contacts. If you have an air compressor or a can of compressed air, blow out any water that may be inside the recessed connector housing.
- Remove the tires/wheels from the vehicle and gently rinse the mud and dirt off with a garden hose. Avoid rinsing the bearings and transmission.

NOTICE: Never use a pressure washer to clean your vehicle.

- Use an air compressor or a can of compressed air to dry the vehicle and help remove any water that may have gotten into small crevices or corners.
- Spray the bearings, drive train, fasteners and other metal parts with a water-displacing light oil or lubricant. Do not spray the motor.
- Let the vehicle air dry before you store it. Water (and oil) may continue to drip for a few hours.
- Increase the frequency of disassembly, inspection and lubrication of the following:
 - Front and rear axle hub assembly bearings.
- All transmission cases, gears and differentials.
- Motor—clean with an aerosol motor cleaner and re-oil the bushings with lightweight motor oil.

SPECIFICATIONS

| Transmitter | |
|-----------------|-----------------------------------|
| Frequency | 2.4GHz |
| Battery | AA x 4 |
| Servo | |
| Power Supply | 4.8V~6V |
| Output Torque | 41.7 oz-in @6.0V (3.0 kg-cm) |
| | 34.7 oz-in @6.0V (2.5 kg-cm) |
| Operating Speed | 0.12 Sec/60° @6.0V |
| | 0.14 Sec/60° @4.8V |
| Size | 28.19 (L) x 12.8 (W) x 27.0mm (H) |

| Electronic Speed Control (ESC) | |
|--------------------------------|--|
| Input Voltage | |

| Input Voltage | 6V-7.4V |
|-------------------------|-----------------------------------|
| Electric Capacity (FET) | Forward 20A/160A |
| Electric Capacity (FET) | Reverse 20A/160A |
| PWM Frequency | 1kHz |
| BEC Voltage | 5V/1A |
| Size | 32.70mm (L) x 33mm (W) x 21mm (H) |
| Weight | 27.4 g |

COMPONENTS

CHARGING WARNINGS

WARNING: Failure to exercise caution while using this product and comply with the following warnings could result in product malfunction, electrical issues, excessive heat, FIRE, and ultimately injury and property damage.


- Read all safety precautions and literature prior to use of this product.
- Never leave the battery and charger unattended during use.
- Never allow children under 14 years of age to charge battery packs.
- Never attempt to charge dead or damaged batteries.
- Never charge a battery if the cable has been pinched or shorted.
- Never allow batteries or charger to come into contact with moisture at any time.
- Never charge batteries in extremely hot or cold places (recommended between 50–80°F (10–26°C)) or place in direct sunlight.
- Always use only Ni-MH rechargeable batteries. This charger cannot charge batteries such as "heavy duty", "alkaline", "mercury" or "lithium" battery.

- Always connect to the charger correctly.
- Always disconnect the battery and charger after charging and let them cool between charges.
- · Always inspect the battery before charging.
- Always terminate all processes and contact Horizon Hobby if the product malfunctions.
- Always make sure you know the specifications of the battery to be charged or discharged to ensure it meets the requirements of this charger.
- Always constantly monitor the temperature of the battery pack while charging.
- Always end the charging process if the charger or battery becomes hot to the touch or starts to change form during the charge process.
- Always charge in a well ventilated area.


CHARGING THE VEHICLE BATTERY

- Connect the battery pack to the charger.
 Connect the charger to an AC power source.
- 3. Allow the battery pack to charge for 9 hours.


NOTICE: The vehicle battery charger produces 100 milliamps per hour. Divide the battery capacity (mAh) on the label by 100 to determine how long the battery needs to charge. For example, a 900mAh battery requires 9 hours to charge.

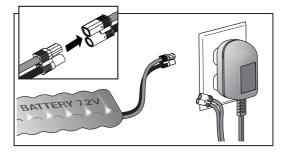

REMOVING THE VEHICLE BODY

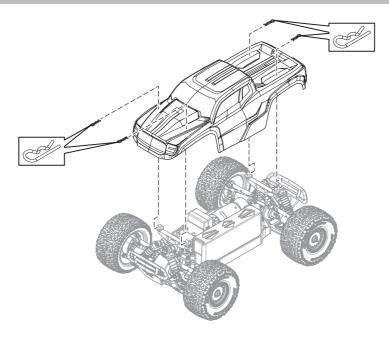

INSTALLING TRANSMITTER BATTERIES

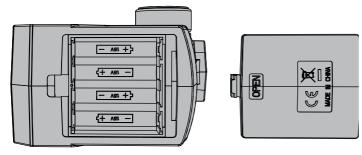

TRANSMITTER BATTERY SAFETY PRECAUTIONS

- Never install damaged batteries.
- Never install batteries of mixed types or of different ages in the transmitter.
- Always remove exhausted batteries.


- 1. Slide the panel open on the bottom of the transmitter.
- Obey the battery plus (+) and minus (-) diagram in the transmitter to install 4 AA batteries.
 Slide the panel closed.

We recommend using only alkaline AA batteries in the transmitter, however, it is possible to use rechargeable Ni-MH batteries.

CAUTION: If using rechargeable batteries, charge only rechargeable batteries. Charging non-rechargeable batteries may cause the batteries to burst, resulting in injury to persons and/or damage to property.


- Always remove batteries before storing the transmitter.
- Low battery power can result in loss of control of the RC vehicle.

TRANSMITTER CONTROLS

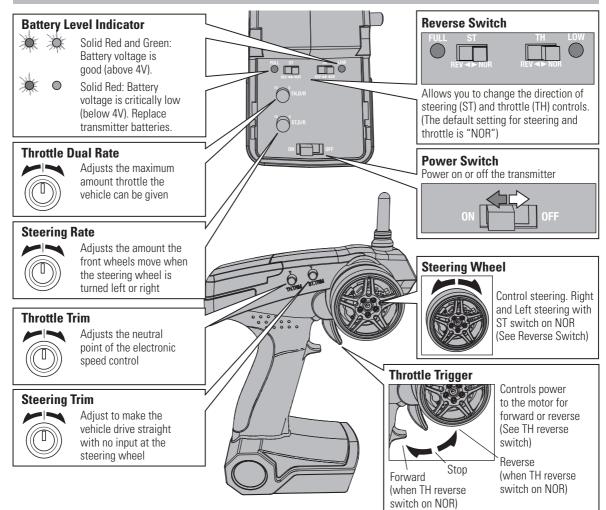


INSTALLING THE VEHICLE BATTERY

- 1. Turn the battery door latch counter-clockwise to release the battery door.
- 2. Remove the battery door from the vehicle.
- 3. Connect the battery to the Electronic Speed Control (ESC) /Receiver unit connector within the battery compartment.
- 4. Install the vehicle battery pack as shown.
- 5. Re-install the battery door.
- 6. Turn the battery door latch clockwise to secure the door.

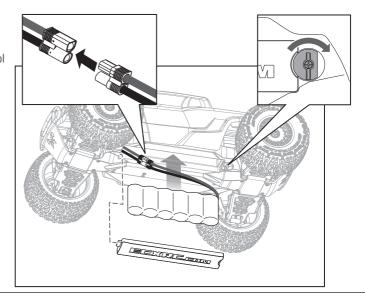


GETTING STARTED


1. Power on the transmitter.

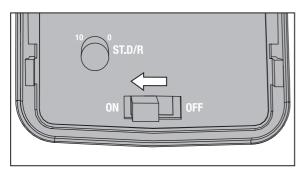


3. Do a test of the transmitter's control of the vehicle with the vehicle's wheels off the ground.

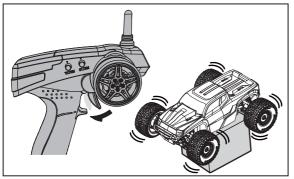

2. Connect the battery to the Electronic Speed Control (ESC) / Receiver unit and power on the vehicle.

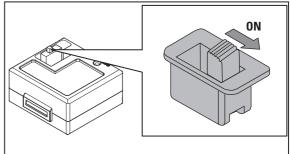


4. Start driving slowly. If the wheels are not straight, adjust the steering trim dial on the transmitter.

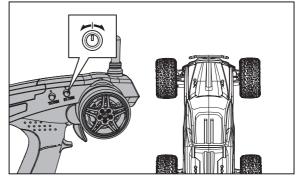

TIP: Seat the motor brushes by driving smoothly on a flat surface during use of the first battery charge. Properly seating the motor brushes will increase the life and performance of the motor.

INSTALLING THE VEHICLE BODY

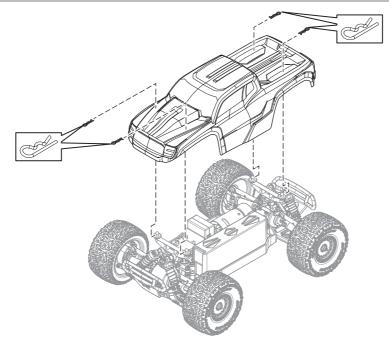

- ALWAYS turn on your transmitter before you turn on the receiver in the vehicle. Always turn off the receiver before turning your transmitter off.
- ALWAYS operate your vehicle in a wide open area. Operating the vehicle in a small space or indoors can cause overheating at low speeds. Operating at low speed increases heat in the electronic speed control (ESC). Overheating can damage the vehicle and failure may result.


Steering Dual Rate

- If the vehicle turns too sharply and/or spins out easily, reduce the steering dual rate (turn the knob counterclockwise).
- For sharper or additional steering, increase the steering dual rate (turn the knob clockwise).

Throttle Operation

- Pull the transmitter trigger to increase throttle.
- Push the trigger to apply brake or reverse.


IMPORTANT: The slower the vehicle is moving, the quicker it will change from forward to reverse.

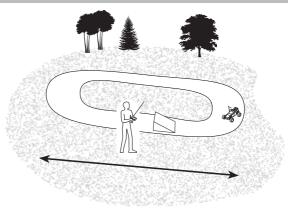




WHEN YOU ARE FINISHED


1. Power off the vehicle.

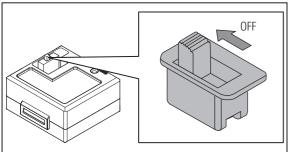


3. Remove the battery from the vehicle.

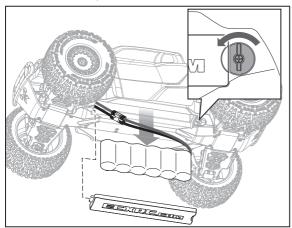

2. Power off the transmitter.

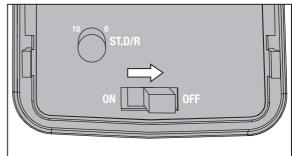


4. Disconnect the battery from the ESC/Receiver unit.

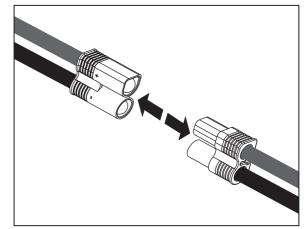

SETTING THE GEAR MESH

The gear mesh has already been set at the factory. Setting the gear mesh is only necessary when changing motors or gears. You must remove the vehicle's gear cover (A) to make this adjustment. Proper gear mesh (how the gear teeth meet) is important to the performance of the vehicle. When the gear mesh is too loose, the spur gear could be damaged by the pinion gear of the motor. If the mesh is too tight, speed could be limited and the motor and ESC will overheat. Set the gear mesh by following these simple steps:

- 1. Remove 7 screws to remove the gear cover (A).
- 2. Loosen the 2 motor screws (B).
- 3. Put a small piece of paper (C) between the pinion and spur gears.
- 4. Push the gears together while tightening the motor screws.
- 5. Rotate the gears to remove the paper. The gearing should move a small amount.
- 6. Reinstall the gear cover.

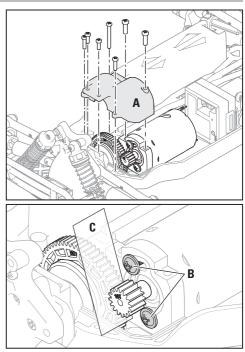

INITIAL SETUP

MOTOR CARE

- Seat the motor brushes by driving smoothly on a flat surface during use of the first battery charge.
- Prolong motor life by preventing overheating conditions. Undue motor wear results from frequent turns, stops and starts, pushing objects, driving in deep sand and tall grass, and driving continuously up hill. Not allowing motor to cool between runs can quickly diminish the performance of your vehicle. Allow adequate time for motor to cool to ambient temperature betweens runs for best vehicle performance.
- Over-temperature protection is installed on the ESC to prevent circuit damage, but cannot protect the motor from driving against heavy resistance.

RIDE HEIGHT ADJUSTMENT

Ride height is an adjustment that affects the way the vehicle jumps, turns and goes over bumps. Drop one end of the vehicle from approximately 3 inches (75 mm) in height onto a flat surface. When dropping the front of the vehicle, after the vehicle settles, make sure the front arms are equal and parallel to the flat surface. Do the same with the rear to make sure both arms are parallel with the flat surface. To adjust your ride height, either add or remove spring clips to achieve the desired ride height.

Lower the front ride height to increase steering. Lower the rear ride height to increase traction but decrease steering.

BINDING

FAILSAFE


In the unlikely event that the radio connection is lost during use (possibly due to low transmitter batteries or distance between the receiver and transmitter), the receiver will hold the steering at the last command with no throttle.

If the receiver is powered on before powering on the transmitter, the receiver will enter this failsafe mode. When the transmitter is powered on, normal control is resumed.

Binding is the process of programming the receiver to recognize the GUID (Globally Unique Identifier) code of a single specific transmitter. The included transmitter and receiver are bound at the factory. If you need to rebind, follow the instructions below.

- 1. Power off the transmitter and ESC.
- 2. Connect a fully charged battery pack to the ESC.

- 3. Press and hold the bind button while powering up the ESC. After 2 seconds the ESC will be in bind mode.
- 4. Release the bind button and power on transmitter.
- 5. Binding is complete when you hear three beeps from the ESC.



You must rebind when binding the receiver to a different transmitter.

NOTICE: Do not attempt to bind the transmitter and receiver if there are other compatible transmitters in bind mode within 400 feet. Doing so may result in unexpected binding.

MAINTENANCE

Your ECX 1:18 Ruckus 4WD Monster Truck needs periodic maintenance and cleaning to keep performing at its optimal level. After each run:

- 1. Look over your vehicle to make sure there is no physical damage that can impede the operation of your vehicle, such as broken parts or tires that may have come unglued and need repair.
- 2. If there are no defects or broken parts that need to be repaired, completely wipe down the vehicle and body using paper towels or shop towels. In hard to reach places, use a toothbrush or a small brush to remove dirt or debris out of the small areas that cannot be removed with a towel.
- 3. Screws can come loose over time and need to be retightened. For screws fastening into plastic parts, make sure they fit snugly but are not over tightened, which could cause the plastic to strip out.

4. If you plan to store your vehicle for more than a week, it is a good idea to remove the batteries from the radio and vehicle to prevent any unexpected damage, such as corrosion, that can result in costly repairs.

NOTICE: A small amount of current is constantly pulled from the battery when it is plugged in, even with the power switch turned to OFF. Always unplug your vehicle's battery from the ESC when not in use to prevent it from fully discharging.

5. Perform any other needed repairs to parts that may have broken off the chassis. Driving a damaged vehicle will result in costly and possibly irreparable damage to the vehicle.

| Problem | Possible Cause | Solution | | | |
|--------------------|---|--|--|--|--|
| Short Run Time | Vehicle batteries damaged/low voltage | Charge the vehicle battery pack | | | |
| | Motor dirty or brushes worn | Check/clean/replace the motor | | | |
| | Motor dirty or brushes worn | Check/clean/replace the motor | | | |
| Sluggish Action | Bind in drivetrain | Clean/adjust the gear mesh between the spur and pinion gears | | | |
| | Vehicle batteries have low voltage | Charge the vehicle battery pack | | | |
| Controls Reversed | ST. REV or TH. REV | Change switch position on the transmitter | | | |
| Motor/ESC overheat | Bind in drivetrain | Clean/adjust the gear mesh between the spur and pinion gears | | | |
| | Transmitter batteries low | Replace/recharge | | | |
| Decen't Operate | Transmitter powered off | Power On | | | |
| Doesn't Operate | ESC powered off | Power On | | | |
| | AA batteries have low voltage | Charge or replace the vehicle battery pack | | | |
| | Transmitter batteries low | Replace/recharge | | | |
| Poor Range | Transmitter antenna is damaged or loose | Check/tighten | | | |
| | Receiver antenna damaged | Check/repair/replace | | | |

TROUBLESHOOTING GUIDE

What this Warranty Covers

Horizon Hobby, Inc., (Horizon) warrants to the original purchaser that the product purchased (the "Product") will be free from defects in materials and workmanship at the date of purchase.

What is Not Covered

This warranty is not transferable and does not cover (i) cosmetic damage, (ii) damage due to acts of God, accident, misuse, abuse, negligence, commercial use, or due to improper use, installation, operation or maintenance, (iii) modification of or to any part of the Product, (iv) attempted service by anyone other than a Horizon Hobby authorized service center, (v) Product not purchased from an authorized Horizon dealer, or (vi) Product not compliant with applicable technical regulations.

OTHER THAN THE EXPRESS WARRANTY ABOVE, HORIZON MAKES NO OTHER WARRANTY OR REPRESENTATION, AND HEREBY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, IN-CLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE PURCHASER ACKNOWLEDGES THAT THEY ALONE HAVE DETERMINED THAT THE PRODUCT WILL SUITABLY MEET THE REQUIREMENTS OF THE PURCHASER'S INTENDED USE.

Purchaser's Remedy

Horizon's sole obligation and purchaser's sole and exclusive remedy shall be that Horizon will, at its option, either (i) service, or (ii) replace, any Product determined by Horizon to be defective. Horizon reserves the right to inspect any and all Product(s) involved in a warranty claim. Service or replacement decisions are at the sole discretion of Horizon. Proof of purchase is required for all warranty claims. SERVICE OR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE PURCHASER'S SOLE AND EXCLUSIVE REMEDY.

Limitation of Liability

HORIZON SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCI-DENTAL OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY, REGARD-LESS OF WHETHER SUCH CLAIM IS BASED IN CONTRACT, WAR-RANTY, TORT, NEGLIGENCE, STRICT LIABILITY OR ANY OTHER THEORY OF LIABILITY, EVEN IF HORIZON HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Further, in no event shall the liability of Horizon exceed the individual price of the Product on which liability is asserted. As Horizon has no control over use, setup, final assembly, modification or misuse, no liability shall be assumed nor accepted for any resulting damage or injury. By the act of use, setup or assembly, the user accepts all resulting liability. If you as the purchaser or user are not prepared to accept the liability associated with the use of the Product, purchaser is advised to return the Product immediately in new and unused condition to the place of purchase.

Law

These terms are governed by Illinois law (without regard to conflict of law principals). This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Horizon reserves the right to change or modify this warranty at any time without notice.

WARRANTY SERVICES

Questions, Assistance, and Services

Your local hobby store and/or place of purchase cannot provide warranty support or service. Once assembly, setup or use of the Product has been started, you must contact your local distributor or Horizon directly. This will enable Horizon to better answer your

questions and service you in the event that you may need any assistance. For questions or assistance, please visit our website at www.horizonhobby.com, submit a Product Support Inquiry, or call the toll free telephone number referenced in the Warranty and Service Contact Information section to speak with a Product Support representative.

Inspection or Services

If this Product needs to be inspected or serviced and is compliant in the country you live and use the Product in, please use the Horizon Online Service Request submission process found on our website or call Horizon to obtain a Return Merchandise Authorization (RMA) number. Pack the Product securely using a shipping carton. Please note that original boxes may be included, but are not designed to withstand the rigors of shipping without additional protection. Ship via a carrier that provides tracking and insurance for lost or damaged parcels, as Horizon is not responsible for merchandise until it arrives and is accepted at our facility. An Online Service Request is available at http://www.horizonhobby. com/content/_service-center_render-service-center. If you do not have internet access, please contact Horizon Product Support to obtain a RMA number along with instructions for submitting your product for service. When calling Horizon, you will be asked to provide your complete name, street address, email address and phone number where you can be reached during business hours. When sending product into Horizon, please include your RMA number, a list of the included items, and a brief summary of the problem. A copy of your original sales receipt must be included for warranty consideration. Be sure your name, address, and RMA number are clearly written on the outside of the shipping carton.

NOTICE: Do not ship LiPo batteries to Horizon. If you have any issue with a LiPo battery, please contact the appropriate Horizon Product Support office.

Warranty Requirements

For Warranty consideration, you must include your original sales receipt verifying the proof-of-purchase date. Provided warranty conditions have been met, your Product will be serviced or replaced free of charge. Service or replacement decisions are at the sole discretion of Horizon.

Non-Warranty Service

Should your service not be covered by warranty, service will be completed and payment will be required without notification or estimate of the expense unless the expense exceeds 50% of the retail purchase cost. By submitting the item for service you are agreeing to payment of the service without notification. Service estimates are available upon request. You must include this request with your item submitted for service. Non-warranty service estimates will be billed a minimum of ½ hour of labor. In addition you will be billed for return freight. Horizon accepts money orders and cashier's checks, as well as Visa, MasterCard, American Express, and Discover cards. By submitting any item to Horizon for service, you are agreeing to Horizon's Terms and Conditions found on our website http://www. horizonhobby.com/content/_service-center_render-service-center.

ATTENTION: Horizon service is limited to Product compliant in the country of use and ownership. If received, a noncompliant Product will not be serviced. Further, the sender will be responsible for arranging return shipment of the un-serviced Product, through a carrier of the sender's choice and at the sender's expense. Horizon will hold noncompliant Product for a period of 60 days from notification, after which it will be discarded.

WARRANTY AND SERVICE CONTACT INFORMATION

| Country of Purchase Horizon Hobby | | Contact Information | Address | |
|-----------------------------------|---|---|---|--|
| | Horizon Service Center (Repairs and Repair Requests) | servicecenter.horizonhobby.com/Re- questForm/ | | |
| United States of | Horizon Product Support (Product Technical Assistance) | www.quickbase.com/db/ bghj7ey8c?a=GenNewRecord | 4105 Fieldstone Rd | |
| America | | 888-959-2306 | Champaign, Illinois, 61822 USA | |
| | Sales | sales@horizonhobby.com | | |
| | 29162 | 888-959-2306 | | |
| | Service/Parts/Sales: | sales@horizonhobby.co.uk | Units 1–4 , Ployters Rd, Staple Tye Harlow, Essex, CM18 7NS, United Kingdom | |
| United Kingdom | Horizon Hobby Limited | +44 (0) 1279 641 097 | | |
| Cormony | Horizon Technischer Service | service@horizonhobby.de | Christian-Junge-Straße 1 | |
| Germany | Sales: Horizon Hobby GmbH | +49 (0) 4121 2655 100 | 25337 Elmshorn, Germany | |
| France | Service/Parts/Sales: | infofrance@horizonhobby.com | 11 Rue Georges Charpak 77127 Lieusaint, France | |
| France | Horizon Hobby SAS | +33 (0) 1 60 18 34 90 | | |
| China | Service/Parts/Sales: | info@horizonhobby.com.cn | Room 506, No. 97 Changshou Rd. Shanghai, China 200060 | |
| GIIIId | Horizon Hobby – China | +86 (021) 5180 9868 | | |

COMPLIANCE INFORMATION FOR THE EUROPEAN UNION

Declaration of Conformity

(in accordance with ISO/IEC 17050-1)No. HH2013062305Product(s):ECX Ruckus 1:18th 4WD MT RTRItem Number(s):Equipment class:1

The object of declaration described above is in conformity with the requirements of the specifications listed below, following the provisions of the European R&TTE Directive 1999/5/EC, EMC Directive 2004/108/EC and LVD Directive 2006/95/EC:

EN 300-328 V1.7.1: 2006 EN 301 489-1 V1.9.2: 2012 EN301 489-17 V2.1.1: 2009

EN60950-1:2006+A11:2009+A1:2010+A12: 2011

EN55022:2010 + AC:2011 EN55024:2010

EN61000-3-2:2006+A1:2009+A2:2009 EN61000-3-3:2008

Signed for and on behalf of: Horizon Hobby, Inc. Champaign, IL USA June 23, 2013


Steven A. Hall Executive Vice President and Chief Operating Officer International Operations and Risk Management Horizon Hobby, Inc.

Instructions for disposal of WEEE by users in the European Union




This product must not be disposed of with other waste. Instead, it is the user's responsibility to dispose of their waste equipment by handing it over to a designated collections point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or where you purchased the product.


PARTS DIAGRAM | EXPLOSIONSZEICHNUNG | VUE ÉCLATÉE DES PIÉCES | ESPLOSO DEL MODELLO CON REFERENZA PEZZI

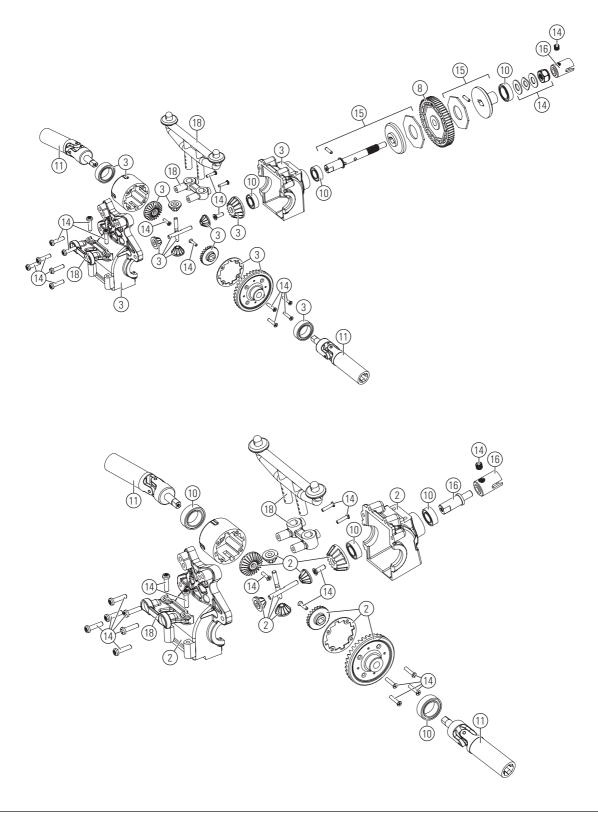

PARTS DIAGRAM | EXPLOSIONSZEICHNUNG | VUE ÉCLATÉE DES PIÉCES | ESPLOSO DEL MODELLO CON REFERENZA PEZZI

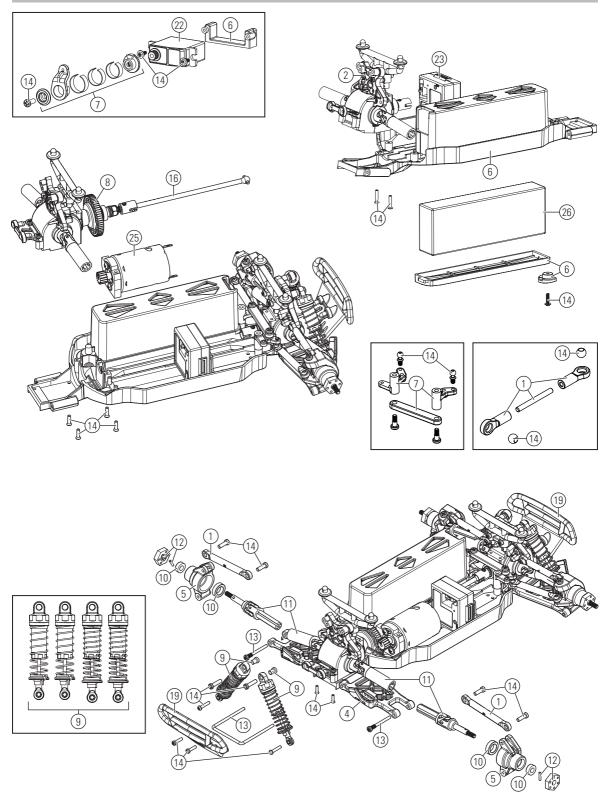

PARTS DIAGRAM | EXPLOSIONSZEICHNUNG | VUE ÉCLATÉE DES PIÉCES | ESPLOSO DEL MODELLO CON REFERENZA PEZZI

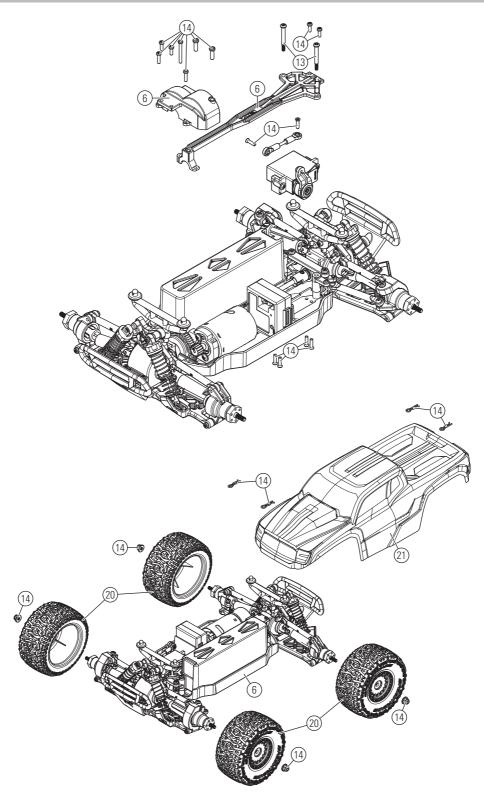

| | PA | RTS LIST | ERSATZTE | ILE | PIÈCES DE REC | CHANGE PE | ZZI D | I RICAMBIO |
|----|---|---|----------------|--|--|---|---|--|
| | # | Description | | Besc | chreibung | Description | | Descrizione |
| 1 | ECX214002 | Link Set: 1:18 4 | 1WD All | ECX 1 Anlen | :18 Kunststoff kset | Set de biellettes | | Set collegamenti: 1:18 4WD tutti |
| 2 | ECX212000 | Front Transmiss Assembled: 1:1 | 18 4WD All | vorne | | assemblé avec ca | arter | Trasmissione anteriore assemblata: 1:18 4WD tutti |
| 3 | ECX212001 | Rear Transmiss Assembled : 1: | 18 4WD All | hinter | | Différentiel arriè assemblé avec ca | arter | Trasmissione posteriore assemblata: 1:18 4WD tutti |
| 4 | ECX214000 | Suspension Ari 1:18 4WD All | | | :18 Querlenker Set | Set de triangles o suspension | | Set bracci sospensione: 1:18 4WD tutti |
| 5 | ECX214001 | | | Set de fusées et étriers porte fusées | | Set fuso, mozzo e supporto: 1:18 4WD tutti | | |
| 6 | ECX211001 | Chassis Set: 1: | | | :18 Chassis Set | Châssis et renfor | t | Set telaio: 1:18 4WD tutti |
| 7 | ECX214003 | Servo Saver Se 1:18 4WD All | | Lenkz | :18 Servo Saver und ubehör | Sauve servo | | Set salva servo: 1:18 4WD tutti |
| 8 | ECX212002 | Pinion & Spur (4WD All | | Haupt | :18 Ritzel und zahnrad | Pignon et couron | | Set pignone e corona: 1:18 4WD tutti |
| 9 | ECX213000 | Complete Shoc 4WD All | | | :18 Dämpfer Set | Set d'amortisseu | | Set completo ammortizzatori: 1:18 4WD tutti |
| 10 | ECX217000 | Complete Bear Set: 1:18 4WD | All | | :18 Kugellagersatz | Set de roulement paliers | ts et | Set completo di cuscinetti e bronzine: 1:18 4WD tutti |
| 11 | ECX212003 | Complete Drive 1:18 4WD All | | Set | :18 Antriebsachsen | Set de cardans | | Set completo trasmissione: 1:18 4WD tutti |
| 12 | ECX212004 | | | | :18 Mitnehmer Set | Set d'hexagones roues | | Set esagoni ruote: 1:18 4WD tutti |
| 13 | ECX216000 | Hingepin Set: 1:18 4WD All | | | :18 Hingepin Set | Set d'axes de su | spension | Set perni cerniere: 1:18 4WD tutti |
| 14 | ECX216001 | Complete Hard 4WD All | | | :18 Zubehörset | Set de visserie | | Set completo viteria: 1:18 4WD tutti |
| 15 | ECX212005 | Slipper Asseml All | bly: 1:18 4WD | ECX 1 | :18 Slipper montiert | Slipper complet | | Gruppo antisaltellamento: 1:18 4WD tutti |
| 16 | ECX212006 | Center Drivesh 1:18 4WD All | | | :18 Antriebswelle montiert | Cardan central co | omplet | Gruppo trasmissione centrale: 1:18 4WD tutti |
| 17 | ECX212007 | Motor Mount: 1:19 /\//D All | | ECX 1 | :18 Motorhalter | Support moteur | | Supporto motore: 1:18 4WD tutti |
| 18 | ECX211004 | 4 Body Mount Set: 1:18 4WD All | | ECX 1 Karos | :18 seriebefestigungs Set | Support de carro | sserie | Set supporto carrozzeria: 1:18 4WD tutti |
| 19 | ECX211000 | Bumper Set: 1:18 4WD Ruckus | | | luckus 1:18 4WD änger Set Vorne/ n | Set de pare choc | S | Set paraurti: 1:18 4WD Ruckus |
| 20 | ECX41000 | FF/RR Premount Tire: 1:18 4WD Ruckus | | | Aini Ruckus nsatz Vorne/Hinten ebt | Pneus prémontés jantes Av/arr | s sur | FF/RR premontaggio gomme: 1:18 4WD Ruckus |
| 21 | ECX210000 Body Set, Decorated: 1:18 4WD Ruckus | | | Vini Ruckus serie lackiert u. bt | Carrosserie déco | rée | Set carrozzeria, decorata: 1:18 4WD Ruckus | |
| 22 | SPMS401 | Mini Servo | | Mini | Servo | Mini servo | | Mini Servo |
| 23 | ECX18001 | Mini ECX/Rx, 2 | .4GHz, WP | | ECX/Rx 2.4Ghz wasserdicht | Module Rx/vario étanche | 2.4GHz | Mini ECX/Rx, 2.4GHz, WP |
| 24 | ECX13001 | 2-Channel 2.40 | Hz Transmitter | | al 2.4 Ghz Sender | Emetteur 2 voies | 2.4GHz | Trasmettitore 2 canali 2.4GHz |
| 25 | DYNS1210 | Tazer™ 380 Mo | otor | Tazer | 380 Motor | Moteur Tazer 380 |) | Motore Tazer 380 |
| 26 | DYN1473 | 7.2V 1200mAh Battery, EC3 | Ni-MH | 7.2V Akku, | I200mAh Ni-MH EC3 | Batterie Ni-Mh 7 1200mA, prise El | | Batteria 7.2V 1200mAh Ni-MH, EC3 |
| 27 | DYNC1001 | 100mA Wall Cl EC3™ Connect | | 100m Ansch | a Netzlader mit EC3 Iluss | Chargeur mural 1 avec prise EC3 | 00mA | Caricatore da muro 100mA con connettore EC3 |



ECX01000|ECX01000EU|ECX01000UK

www.ecxrc.com

© 2013 Horizon Hobby, Inc. ECX, the ECX logo, Ruckus, Tazer, EC3 and the Horizon Hobby logo are trademarks or registered trademarks of Horizon Hobby, Inc. Created 06/2013 34838