


Name: Kit Setup - Laydown Clay		Date: _____ Event: _____		
City: _____	State: _____	Track: _____		

Track Conditions	☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove ☐ Wet ☐ Grass ☐ Low Bite ☐ High Bite
☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy ☐ Dry ☐ Dusty ☐ Astro Turf ☐ Med Bite ☐ Other _____	

Front Suspension


Toe: +/- 0 deg
 Ride Height: 23mm _____ Camber: -1 deg
 Caster: ☐ 0° ☒ 5°
 Kick Angle: ☐ 20° ☒ 25° ☐ 30°
 VLA Setting: ☐ Short Arm ☒ Long Arm
 Front Pivot: ☐ Alum ☒ Plastic ☐ HRC ☐ Alum HRC
 Kick Shim: ☐ Brass ☒ Plastic
 Oil: 32.5 wt
 Piston: 2 x 1.6mm (TLR233009)
 Spring: ☐ Standard ☒ Low Freq. Color: Silver
 Sway Bar: ☐ 0.8mm ☐ 1.0mm ☐ 1.2mm ☐ _____
 Shock Limiters: 1mm _____ Stroke: 22mm
 Shock Locations: 1 - Middle
 Spindle Ball Stud: ☐ Standard ☒ Low Mount
 Bump Steer Spacers: 1mm
 Ackerman Ball Stud: ☒ Standard ☐ Low Mount
 Ackerman Spacers: 1mm
 Ackerman Arm: ☐ #1 ☐ #2 ☒ #3 ☐ _____
 Axle Spacing: ☐ 0 ☒ +0.5mm ☐ +1mm
 Trail: ☐ 2mm ☐ 3mm ☒ 4mm
 Camber Link: 2 - B

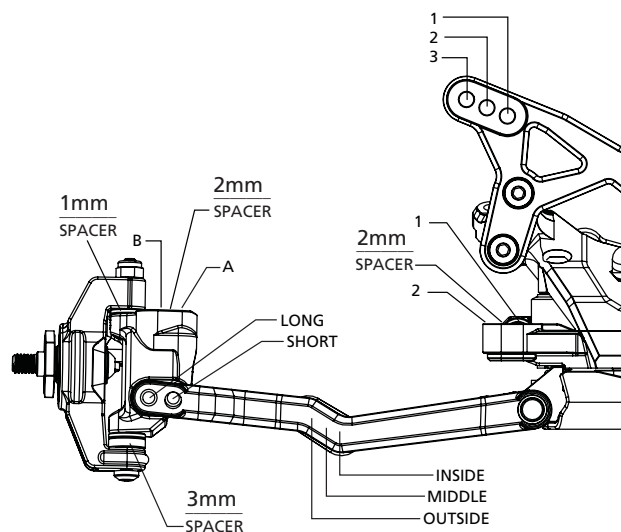

Notes: _____

Rear Suspension


Configuration: ☒ Laydown ☐ Standup
 LD Diff. Height: ☒ Standard ☐ +3.5mm
 Transmission Type: ☒ 3-Gear ☐ 4-Gear
 Toe Inserts: ☐ 0.5 ☐ 1 ☐ 1.5 ☐ 2 ☐ 2.5 ☒ 3 ☐ 3.5 ☐ 4
 Anti-Squat Inserts: ☐ 0 ☐ 0.5 ☐ 1 ☐ 1.5 ☒ 2 ☐ 2.5 ☐ 3
 Inner Roll Center: ☒ LRC ☐ HRC
 Ride Height: 23mm _____ Camber: -1.5 deg
 Rear Hub Spacing: Middle (2mm front, 2mm rear)
 Rear Axle Height: ☒ Standard ☐ +3mm
 Hex Width: Standard
 Sway Bar: ☐ 1.0mm ☐ 1.2mm ☐ 1.4mm ☐ _____
 Oil: 32.5 wt
 Piston: 2 x 1.7mm (TLR233010)
 Spring: ☐ Standard ☒ Low Freq. Color: White
 Shock Limiters: 1mm _____ Stroke: 29mm
 Shock Locations: 2 - Middle
 Shock Mounting: ☒ Front ☐ Rear
 Inner Link Spacer: ☒ -1mm ☐ 0mm ☐ +1mm
 Camber Link: 2 (Standard) - E
 Wing/Wickerbill: 6.5" - 1 line wicker
 Wing Angle: ☐ 0° ☒ 2° ☐ 4°
 Battery Position: Shorty with battery strap
 Diff Type: ☒ Ball ☐ Gear Setting: Normal, 3/4-1 Rotation
 Driveshaft Length: ☒ CVA ☐ Universal Length: 67mm

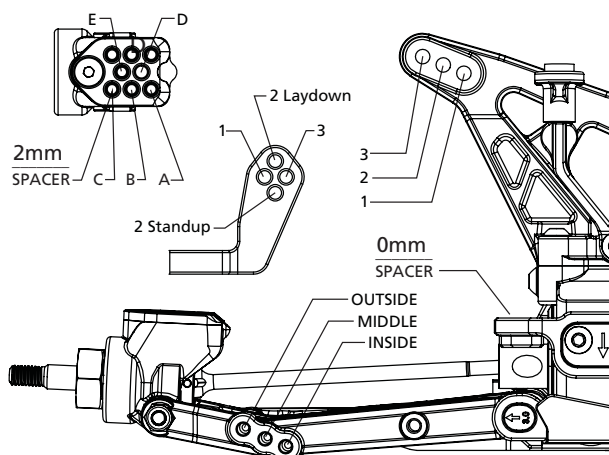

Electronics

Radio: _____	Timing Advance: _____
Servo: _____	Throttle/Brake Expo: _____
ESC: _____	Servo Expo: _____
Initial Brake: _____	Throttle/Brake EPA: _____
Drag Brake: _____	Motor: _____
Throttle Profile: _____	Pinion: _____ Spur: 78T
	Battery: _____

Chassis

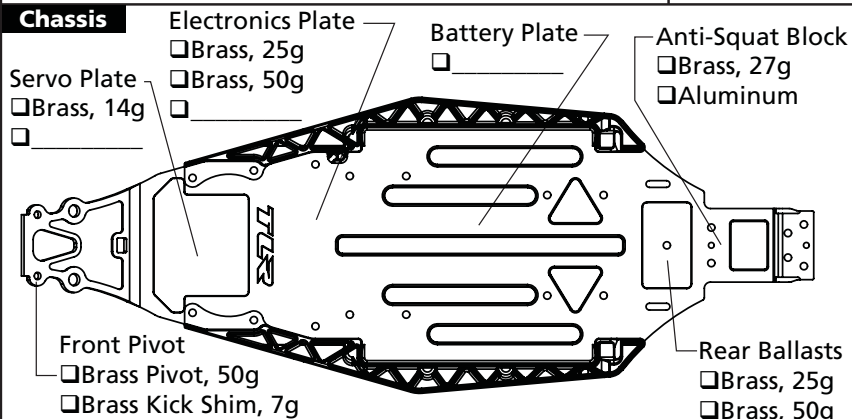

Tires

	Front	Rear
Tire: _____		
Compound: _____		
Insert: _____		
Additive: _____		


Notes: _____

Name: Kit Setup - Stand Up		Date: _____ Event: _____		
City: _____	State: _____	Track: _____		

Track Conditions	☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove ☐ Wet ☐ Grass ☐ Low Bite ☐ High Bite
☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy ☐ Dry ☐ Dusty ☐ Astro Turf ☐ Med Bite ☐ Other _____	

Front Suspension


Toe: +/- 0 deg
 Ride Height: 23mm _____ Camber: -1 deg
 Caster: ☐0° ☒5°
 Kick Angle: ☐20° ☒25° ☐30°
 VLA Setting: ☐Short Arm ☒Long Arm
 Front Pivot: ☐Alum ☒Plastic ☐HRC ☐Alum HRC
 Kick Shim: ☐Brass ☒Plastic
 Oil: 32.5 wt
 Piston: 2 x 1.6mm (TLR233009)
 Spring: ☐Standard ☒Low Freq. Color: Silver
 Sway Bar: ☐0.8mm ☐1.0mm ☐1.2mm ☐
 Shock Limiters: 1mm _____ Stroke: 22mm
 Shock Locations: 1 - Middle
 Spindle Ball Stud: ☐Standard ☒Low Mount
 Bump Steer Spacers: 1mm
 Ackerman Ball Stud: ☒Standard ☐Low Mount
 Ackerman Spacers: 1mm
 Ackerman Arm: ☐#1 ☐#2 ☒#3 ☐
 Axle Spacing: ☐0 ☒+0.5mm ☐+1mm
 Trail: ☐2mm ☐3mm ☒4mm
 Camber Link: 2 - B

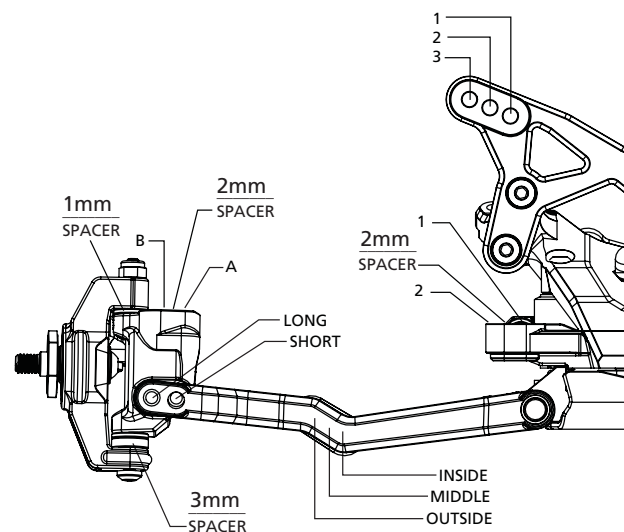

Notes: _____

Rear Suspension

Configuration: ☐Laydown ☒Standup
 LD Diff. Height: ☐Standard ☐+3.5mm
 Transmission Type: ☒3-Gear ☐4-Gear
 Toe Inserts: ☐0.5 ☐1 ☐1.5 ☐2 ☐2.5 ☒3 ☐3.5 ☐4
 Anti-Squat Inserts: ☐0 ☐0.5 ☐1 ☐1.5 ☒2 ☐2.5 ☐3
 Inner Roll Center: ☒LRC ☐HRC
 Ride Height: 23mm _____ Camber: -1.5 deg
 Rear Hub Spacing: Middle (2mm front, 2mm rear)
 Rear Axle Height: ☒Standard ☐+3mm
 Hex Width: Standard
 Sway Bar: ☐1.0mm ☐1.2mm ☐1.4mm ☐
 Oil: 32.5 wt
 Piston: 2 x 1.7mm (TLR233010)
 Spring: ☐Standard ☒Low Freq. Color: White
 Shock Limiters: 0mm _____ Stroke: 30.5mm
 Shock Locations: 2 - Middle
 Shock Mounting: ☐Front ☐Rear
 Inner Link Spacer: ☒-1mm ☐0mm ☐+1mm
 Camber Link: 2 (Stand up) - E
 Wing/Wickerbill: 6.5" - 1 line wicker
 Wing Angle: ☐0° ☐2° ☒4°
 Battery Position: Shorty - Middle
 Diff Type: ☒Ball ☐Gear Setting: Normal, 3/4-1 rotation
 Driveshaft Length: ☒CVA ☐Universal Length: 67mm

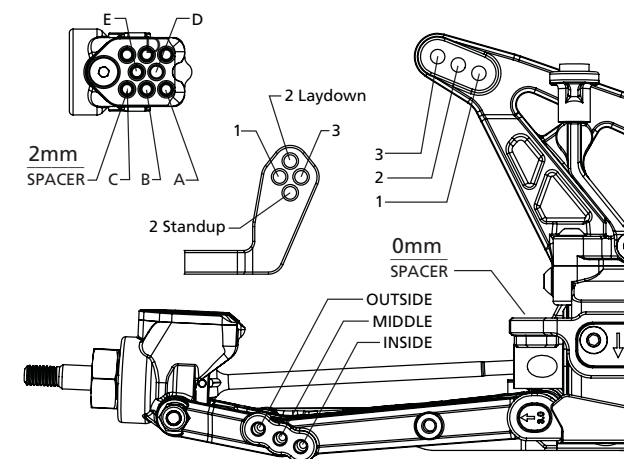

Electronics

Radio: _____	Timing Advance: _____
Servo: _____	Throttle/Brake Expo: _____
ESC: _____	Servo Expo: _____
Initial Brake: _____	Throttle/Brake EPA: _____
Drag Brake: _____	Motor: _____
Throttle Profile: _____	Pinion: _____ Spur: 78T
	Battery: _____

Chassis

Servo Plate ☐ Brass, 14g ☐	Electronics Plate ☐ Brass, 25g ☐ Brass, 50g ☐	Battery Plate ☐
--	---	---

The diagram shows the chassis with various components labeled: Front Pivot, Rear Ballasts, Anti-Squat Block, and various ballast options (Brass, 25g; Brass, 50g; Aluminum). The chassis is shown from a top-down perspective, highlighting the internal structure and the placement of the various components.

Tires

	Front	Rear
Tire: _____	_____	_____
Compound: _____	_____	_____
Insert: _____	_____	_____
Additive: _____	_____	_____
Notes: _____	_____	_____
_____	_____	_____


Name: Laydown, Carpet/Astro Recommended		Date: _____	Event: _____
City: _____		Track: _____	

Track Conditions	☐ Indoor	☐ Tight	☐ Smooth	☐ Hard Packed	☐ Blue Groove	☐ Wet	☐ Grass	☐ Low Bite	☐ High Bite
	☐ Outdoor	☐ Open	☐ Rough	☐ Loose/Loamy	☐ Dry	☐ Dusty	☒ Astro Turf	☐ Med Bite	☐ Other _____



Front Suspension


Toe: +0.5 deg
 Ride Height: 16mm _____ Camber: -1 deg
 Caster: ☐0° ☒5°
 Kick Angle: ☐20° ☒25° ☐30°
 VLA Setting: ☒Short Arm ☐Long Arm
 Front Pivot: ☐Alum ☐Plastic ☒HRC ☐Alum HRC
 Kick Shim: ☐Brass ☐Plastic
 Oil: 37.5 wt
 Piston: 2 x 1.6mm (TLR233009)
 Spring: ☒Standard ☐Low Freq. Color: Black
 Sway Bar: ☐0.8mm ☒1.0mm ☐1.2mm ☐
 Shock Limiters: 1mm _____ Stroke: 23mm
 Shock Locations: 1 - Middle
 Spindle Ball Stud: ☐Standard ☒Low Mount
 Bump Steer Spacers: 1mm
 Ackerman Ball Stud: ☒Standard ☐Low Mount
 Ackerman Spacers: 0mm
 Ackerman Arm: ☐#1 ☒#2 ☐#3 ☐
 Axle Spacing: ☒0 ☐+0.5mm ☐+1mm
 Trail: ☒2mm ☐3mm ☐4mm
 Camber Link: 1 - A

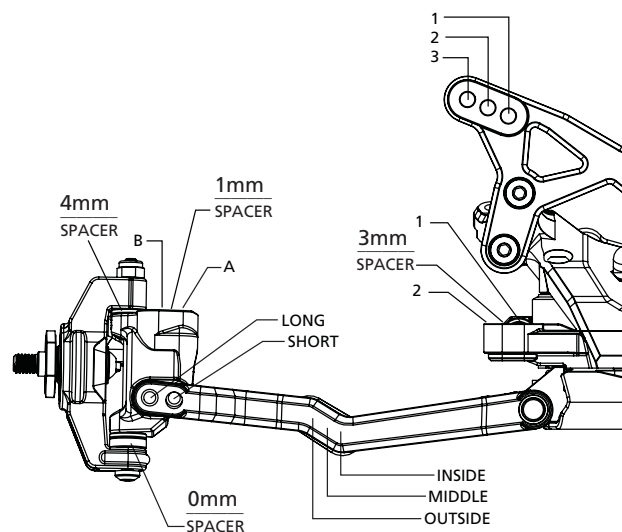

Notes: _____

Rear Suspension


Configuration: ☒Laydown ☐Standup
 LD Diff. Height: ☐Standard ☒+3.5mm
 Transmission Type: ☒3-Gear ☐4-Gear
 Toe Inserts: ☐0.5 ☐1 ☐1.5 ☐2 ☒2.5 ☐3 ☐3.5 ☐4
 Anti-Squat Inserts: ☐0 ☐0.5 ☒1 ☐1.5 ☐2 ☐2.5 ☐3
 Inner Roll Center: ☒LRC ☐HRC
 Ride Height: 17mm _____ Camber: -1.5 deg
 Rear Hub Spacing: Back 1mm (3mm front, 1mm rear)
 Rear Axle Height: ☐Standard ☒+3mm
 Hex Width: Standard
 Sway Bar: ☒1.0mm ☐1.2mm ☐1.4mm ☐
 Oil: 30 wt
 Piston: 2 x 1.7mm (TLR233010)
 Spring: ☒Standard ☐Low Freq. Color: Yellow
 Shock Limiters: 1mm _____ Stroke: 29mm
 Shock Locations: 2 - Middle
 Shock Mounting: ☒Front ☐Rear
 Inner Link Spacer: ☐-1mm ☐0mm ☒+1mm
 Camber Link: 1 - B
 Wing/Wickerbill: 6.5" - 1 line wicker
 Wing Angle: ☒0° ☐2° ☐4°
 Battery Position: Shorty - Full Forward
 Diff Type: ☐Ball ☒Gear Setting: 30,000cs
 Driveshaft Length: ☒CVA ☐Universal Length: 67mm

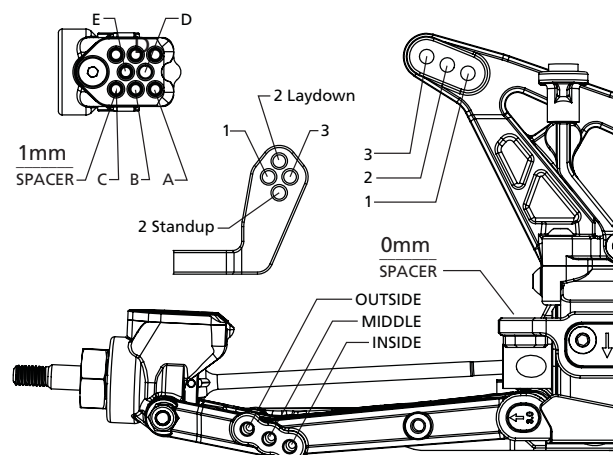

Electronics

Radio: _____	Timing Advance: _____
Servo: _____	Throttle/Brake Expo: _____
ESC: _____	Servo Expo: _____
Initial Brake: _____	Throttle/Brake EPA: _____
Drag Brake: _____	Motor: _____
Throttle Profile: _____	Pinion: _____ Spur: 78T
	Battery: _____

Chassis

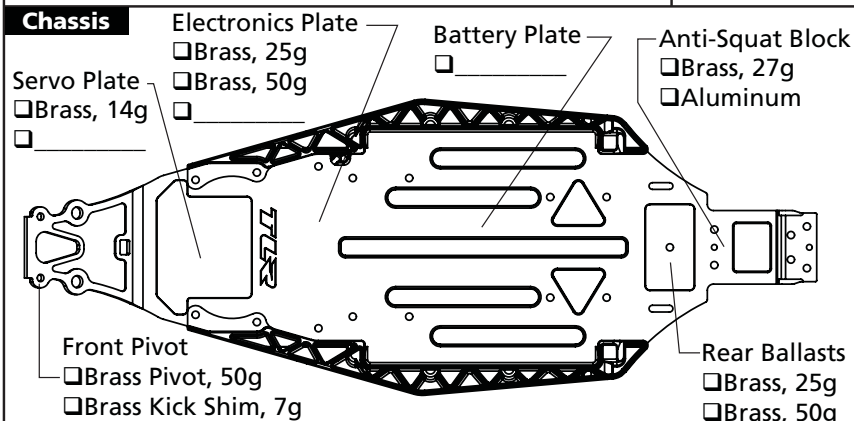

Tires

	Front	Rear
Tire: _____		
Compound: _____		
Insert: _____		
Additive: _____		


Notes: _____

Name: _____		Date: _____ Event: _____		
City: _____ State: _____		Track: _____		

Track Conditions	☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove ☐ Wet ☐ Grass ☐ Low Bite ☐ High Bite
☐ Outdoor ☐ Open ☐ Rough ☐ Loose/Loamy ☐ Dry ☐ Dusty ☐ Astro Turf ☐ Med Bite ☐ Other _____	

Front Suspension


Toe: _____
 Ride Height: _____ Camber: _____
 Caster: ☐0° ☐5°
 Kick Angle: ☐20° ☐25° ☐30°
 VLA Setting: ☐Short Arm ☐Long Arm
 Front Pivot: ☐Alum ☐Plastic ☐HRC ☐Alum HRC
 Kick Shim: ☐Brass ☐Plastic
 Oil: _____
 Piston: _____
 Spring: ☐Standard ☐Low Freq. Color: _____
 Sway Bar: ☐0.8mm ☐1.0mm ☐1.2mm ☐ _____
 Shock Limiters: _____ Stroke: _____
 Shock Locations: _____
 Spindle Ball Stud: ☐Standard ☐Low Mount
 Bump Steer Spacers: _____
 Ackerman Ball Stud: ☐Standard ☐Low Mount
 Ackerman Spacers: _____
 Ackerman Arm: ☐#1 ☐#2 ☐#3 ☐ _____
 Axle Spacing: ☐0 ☐+0.5mm ☐+1mm
 Trail: ☐2mm ☐3mm ☐4mm
 Camber Link: _____

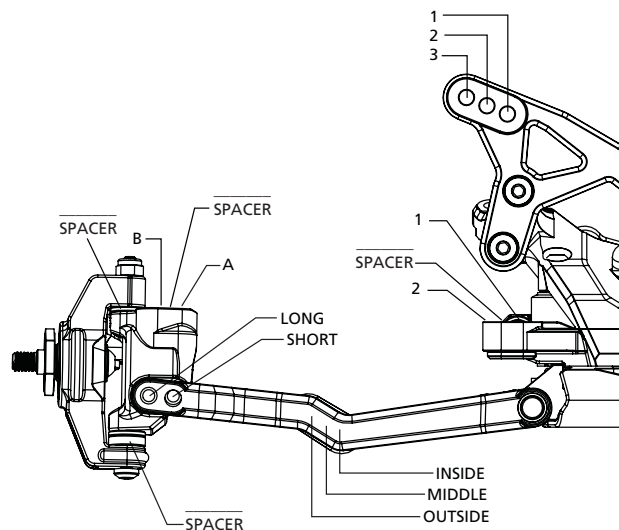

Notes: _____

Rear Suspension


Configuration: ☐Laydown ☐Standup
 LD Diff. Height: ☐Standard ☐+3.5mm
 Transmission Type: ☐3-Gear ☐4-Gear
 Toe Inserts: ☐0.5 ☐1 ☐1.5 ☐2 ☐2.5 ☐3 ☐3.5 ☐4
 Anti-Squat Inserts: ☐0 ☐0.5 ☐1 ☐1.5 ☐2 ☐2.5 ☐3
 Inner Roll Center: ☐LRC ☐HRC
 Ride Height: _____ Camber: _____
 Rear Hub Spacing: _____
 Rear Axle Height: ☐Standard ☐+3mm
 Hex Width: _____
 Sway Bar: ☐1.0mm ☐1.2mm ☐1.4mm ☐ _____
 Oil: _____
 Piston: _____
 Spring: ☐Standard ☐Low Freq. Color: _____
 Shock Limiters: _____ Stroke: _____
 Shock Locations: _____
 Shock Mounting: ☐Front ☐Rear
 Inner Link Spacer: ☐-1mm ☐0mm ☐+1mm
 Camber Link: _____
 Wing/Wickerbill: _____
 Wing Angle: ☐0° ☐2° ☐4°
 Battery Position: _____
 Diff Type: ☐Ball ☐Gear Setting: _____
 Driveshaft Length: ☐CVA ☐Universal Length: _____

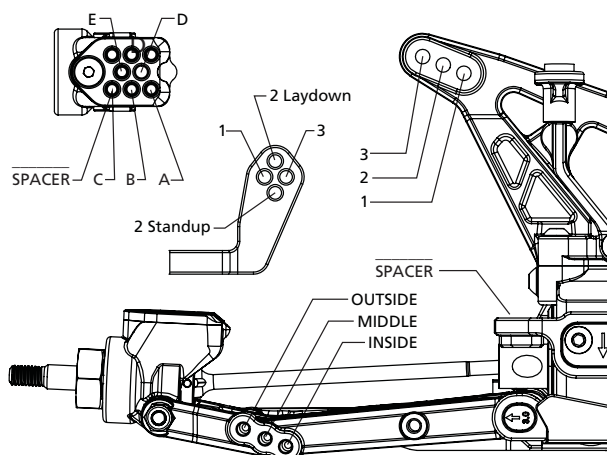

Electronics

Radio: _____ Servo: _____ ESC: _____ Initial Brake: _____ Drag Brake: _____ Throttle Profile: _____	Timing Advance: _____ Throttle/Brake Expo: _____ Servo Expo: _____ Throttle/Brake EPA: _____ Motor: _____ Pinion: _____ Spur: _____ Battery: _____
--	--

Chassis

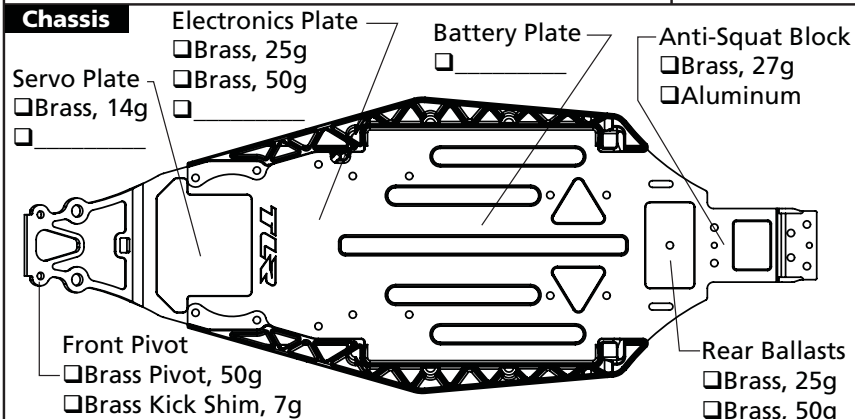

Tires


	Front	Rear
Tire:	_____	_____
Compound:	_____	_____
Insert:	_____	_____
Additive:	_____	_____
Notes:	_____	

Name: _____		Date: _____			
City: _____		State: _____			

Track Conditions	☐ Indoor	☐ Tight	☐ Smooth	☐ Hard Packed	☐ Blue Groove	☐ Wet	☐ Grass	☐ Low Bite	☐ High Bite
	☐ Outdoor	☐ Open	☐ Rough	☐ Loose/Loamy	☐ Dry	☐ Dusty	☐ Astro Turf	☐ Med Bite	☐ Other _____

Front Suspension


Toe: _____
 Ride Height: _____ Camber: _____
 Caster: ☐0° ☐5°
 Kick Angle: ☐20° ☐25° ☐30°
 VLA Setting: ☐Short Arm ☐Long Arm
 Front Pivot: ☐Alum ☐Plastic ☐HRC ☐Alum HRC
 Kick Shim: ☐Brass ☐Plastic
 Oil: _____
 Piston: _____
 Spring: ☐Standard ☐Low Freq. Color: _____
 Sway Bar: ☐0.8mm ☐1.0mm ☐1.2mm ☐ _____
 Shock Limiters: _____ Stroke: _____
 Shock Locations: _____
 Spindle Ball Stud: ☐Standard ☐Low Mount
 Bump Steer Spacers: _____
 Ackerman Ball Stud: ☐Standard ☐Low Mount
 Ackerman Spacers: _____
 Ackerman Arm: ☐#1 ☐#2 ☐#3 ☐ _____
 Axle Spacing: ☐0 ☐+0.5mm ☐+1mm
 Trail: ☐2mm ☐3mm ☐4mm
 Camber Link: _____

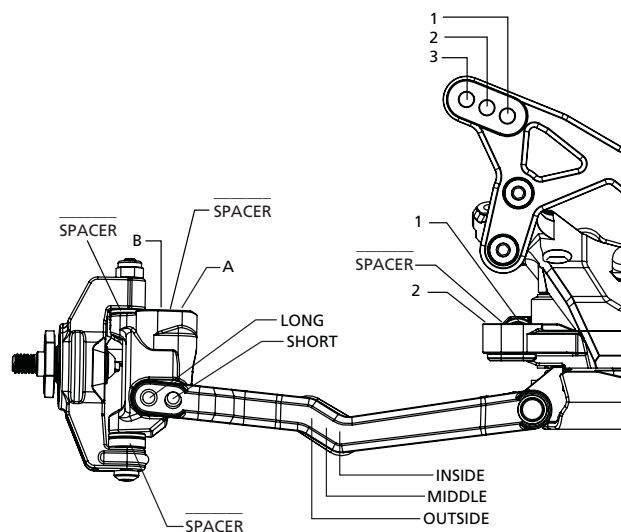

Notes: _____

Rear Suspension


Configuration: ☐Laydown ☐Standup
 LD Diff. Height: ☐Standard ☐+3.5mm
 Transmission Type: ☐3-Gear ☐4-Gear
 Toe Inserts: ☐0.5 ☐1 ☐1.5 ☐2 ☐2.5 ☐3 ☐3.5 ☐4
 Anti-Squat Inserts: ☐0 ☐0.5 ☐1 ☐1.5 ☐2 ☐2.5 ☐3
 Inner Roll Center: ☐LRC ☐HRC
 Ride Height: _____ Camber: _____
 Rear Hub Spacing: _____
 Rear Axle Height: ☐Standard ☐+3mm
 Hex Width: _____
 Sway Bar: ☐1.0mm ☐1.2mm ☐1.4mm ☐ _____
 Oil: _____
 Piston: _____
 Spring: ☐Standard ☐Low Freq. Color: _____
 Shock Limiters: _____ Stroke: _____
 Shock Locations: _____
 Shock Mounting: ☐Front ☐Rear
 Inner Link Spacer: ☐-1mm ☐0mm ☐+1mm
 Camber Link: _____
 Wing/Wickerbill: _____
 Wing Angle: ☐0° ☐2° ☐4°
 Battery Position: _____
 Diff Type: ☐Ball ☐Gear Setting: _____
 Driveshaft Length: ☐CVA ☐Universal Length: _____

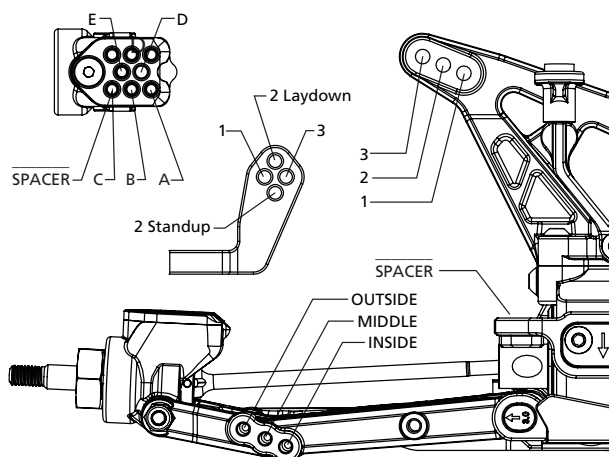

Electronics

Radio: _____	Timing Advance: _____
Servo: _____	Throttle/Brake Expo: _____
ESC: _____	Servo Expo: _____
Initial Brake: _____	Throttle/Brake EPA: _____
Drag Brake: _____	Motor: _____
Throttle Profile: _____	Pinion: _____ Spur: _____
	Battery: _____

Chassis

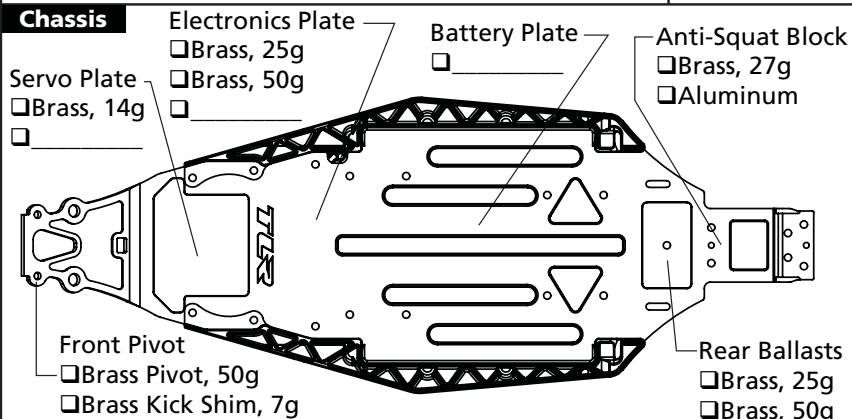

Tires

	Front	Rear
Tire: _____		
Compound: _____		
Insert: _____		
Additive: _____		
Notes: _____		

